

## Terminal Manual Guide





### 1- Android Mobile POS MF919 Features:

- MoreFun MF919 Android POS Terminal Accept all payment types.
- Contactless/Chip (Insert) / QR code / Wallets
- Advanced security PCI PTS 5.x approved
- Multiple connectivities 4G / Wi-Fi/ Bluetooth / USB
- New commerce capabilities Support variety apps Powered by Android10, MF919 is a modern designed payment terminal as smart as mobile phone, perfectly suit to any use cases. Equipped with long life battery, user-friendly interface, large memory. Enable faster processing and more transactions.



## 2- Components of POS MF919 :

- 1.RF card reading area
- 2.Power and RF indicator light
- 3.Display screen
- 4.Microphone
5. Paper cover
- 6.Paper cover handle
- 7.Paper exit slot
- 8.Front camera
- 9.Magnetic card swiping slot
- 10.IC card slot
- 11.Loudspeaker
- 12.Battery cover
- 13.Battery cover push button switch
- 14.Rear camera
- 15.Scan button
- 16.USB Type -C
- 17.Power button
- 18.PSAM card slot
- 19.SIM card slot
- 20.SD card slot

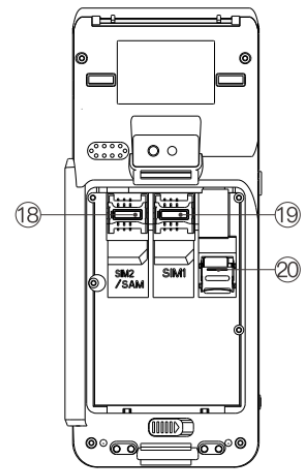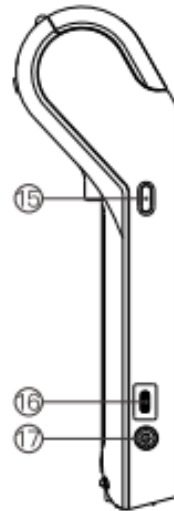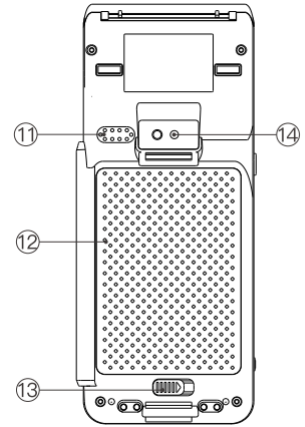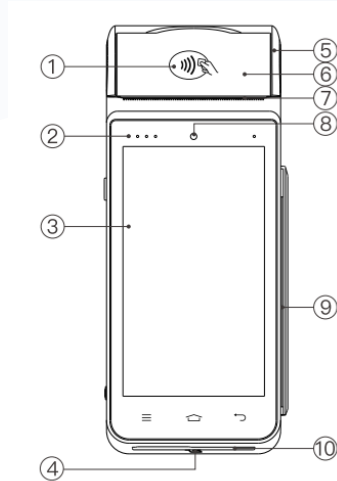

### 3-Device contents:



British adapter



Lithium battery

- Installation and replacement of the lithium battery.
- Please use only the original battery provided by SanadPay.
- Please make sure that the POS is turned off.
- Ensure that the device is disconnected from the current electric.
- Always follow the installation diagram, improper installation may destroy the battery.



1- When installing the battery, first determine which plug is connected to the battery.

2- Remove the battery from this place to open it.

### Device charge:

To maximize the performance of the POS terminal, please charge the battery by following the steps below:

Before use Take the power, supply and connect the cable to the USB port at both ends, then connect the power supply to the electrical outlet. When the red indicator lights up in the top right of the device or the dynamic charging icon appears in the center of the screen, the device is charging.

When the red indicator turns green and the dynamic symbol with charge percentage appears on the screen, the battery is in the process of being charged.

### Battery usage:

**Warning:** Avoid contacting the battery with metal objects or a short circuit to prevent injury or burns.

Please follow the tips below to maximize battery performance:

- 1- It will take longer to charge a new battery or a battery that has not been used for a long time.
- 2- After long-term use, the battery will gradually take longer to charge. It's normal. But if you need a battery for replacement. Contact your device provider.
- 3-The average standby time for a POS terminal is 120 hours. But this may fade depending on the end use and the transactions executed.

**Warning:**

There will be a risk of explosion if the battery is replaced by an inappropriate type.

Be sure to dispose of used batteries, following the instructions.

Installing the SAM Card and SIM Card:

Please follow the instructions below to install SAM cards:

- 1- Open the battery cover as shown.
- 2- Remove the battery.
- 3- Identify the SIM and SAM card slots.
- 4- Place the card with the angled position as shown.



**Precautions:**

- 1- Note that the angle cut for the card must match that of the card slot.
- 2- Make sure to disconnect from the network and turn off the power before performing the above operation.
- 3- Place both ends of the POS on a clean, smooth surface in the opposite direction of the scratches.

**Paper roll installation:**

